



Delivering the **Science** of Nitrogen Generation™

NitroBreeze™ Series



Modular, Portable, “One-Touch” Operation

Reduce Costs, Increase Profits!

Using an in-house nitrogen generator to supply your nitrogen gas demand is the easiest way to reduce nitrogen related costs, and thus increase profits.

The NitroBreeze™ System has been specifically designed to fit the needs of small-to-medium sized businesses in order to eliminate barriers related to footprint, cost, and limited experience. Critical components are protected from ambient dust and inadvertent tampering.

For most needs in this range, a model can be found which will fit through standard doors. With a small footprint, and One-Touch operation, installation and startup are a “Breeze”!

Every system will be factory fine-tuned to meet the customer’s demands at the desired flow, purity, and pressure.

Major Features:

- Nitrogen purity up to 99.9995%
- Low to Moderate capacities
- Installation is a breeze!
- Most options fit through standard 36” door
- Fully plug and play
- Easy “One-Touch” operation
- Password protected screens
- EnergyAssistant™ option available
- HoltecConnect Lite™ option available
- Includes Holtec Prevue™ technology

70 ° F Performance (SCFM)

| Model Number | 95% | 96% | 97% | 98% | 99% | 99.5% | 99.9% | 99.95% | 99.99% | 99.995% | 99.999% |
|--------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|---------|---------|
| HNBS-30M | 13.3 | 12.1 | 11.1 | 9.4 | 7.5 | 6.7 | 5.0 | 4.4 | 3.3 | 2.9 | 2.2 |
| HNBS-40M | 17.4 | 15.9 | 14.6 | 12.3 | 9.9 | 8.8 | 6.6 | 5.8 | 4.4 | 3.8 | 2.9 |
| HNBS-50M | 23.0 | 21.0 | 19.3 | 16.3 | 13.1 | 11.6 | 8.7 | 7.7 | 5.8 | 5.0 | 3.8 |
| HNBS-60M | 28.4 | 25.9 | 23.9 | 20.1 | 16.2 | 14.3 | 10.8 | 9.5 | 7.2 | 6.2 | 4.7 |
| HNBS-75M | 35.1 | 32.0 | 29.5 | 24.8 | 20.0 | 17.7 | 13.3 | 11.8 | 8.8 | 7.7 | 5.8 |
| HNBS-90M | 42.3 | 38.5 | 35.5 | 29.9 | 24.1 | 21.3 | 16.0 | 14.2 | 10.7 | 9.3 | 7.0 |
| HNBS-110M | 49.6 | 45.2 | 41.6 | 35.0 | 28.2 | 24.9 | 18.8 | 16.6 | 12.5 | 10.8 | 8.2 |
| HNBS-125M | 58.4 | 53.1 | 49.0 | 41.2 | 33.2 | 29.3 | 22.1 | 19.5 | 14.7 | 12.8 | 9.6 |
| HNBS-145M | 64.8 | 58.9 | 54.4 | 45.7 | 36.8 | 32.6 | 24.5 | 21.7 | 16.3 | 14.2 | 10.6 |
| HNBS-165M | 76.2 | 69.3 | 63.9 | 53.8 | 43.3 | 38.3 | 28.8 | 25.5 | 19.2 | 16.7 | 12.5 |
| HNBS-195M | 89.1 | 81.0 | 74.7 | 62.9 | 50.6 | 44.8 | 33.7 | 29.8 | 22.4 | 19.5 | 14.6 |
| HNBS-220M | 101.0 | 91.9 | 84.7 | 71.3 | 57.4 | 50.7 | 38.2 | 33.8 | 25.4 | 22.1 | 16.6 |
| Air Factor | 1.817 | 1.887 | 1.976 | 2.100 | 2.312 | 2.522 | 3.002 | 3.234 | 3.849 | 4.107 | 4.693 |

Performance and air factor listed is for ambient temperature 70° F and inlet pressure 110 psig.
Please consult Holtec for performance at other conditions. Air factor listed may vary by ±5%.

95 °F Performance (SCFM)

| Model Number | 95% | 96% | 97% | 98% | 99% | 99.5% | 99.9% | 99.95% | 99.99% | 99.995% | 99.999% |
|--------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|---------|---------|
| HNBS-30M | 12.5 | 11.6 | 10.3 | 8.9 | 7.1 | 6.2 | 4.6 | 4.0 | 3.0 | 2.6 | 1.9 |
| HNBS-40M | 16.4 | 15.2 | 13.6 | 11.6 | 9.4 | 8.1 | 6.0 | 5.3 | 3.9 | 3.4 | 2.5 |
| HNBS-50M | 21.7 | 20.1 | 17.9 | 15.4 | 12.4 | 10.7 | 7.9 | 7.0 | 5.2 | 4.5 | 3.4 |
| HNBS-60M | 26.8 | 24.8 | 22.1 | 19.0 | 15.3 | 13.2 | 9.8 | 8.6 | 6.4 | 5.6 | 4.1 |
| HNBS-75M | 33.1 | 30.6 | 27.3 | 23.5 | 18.9 | 16.4 | 12.1 | 10.6 | 7.9 | 6.9 | 5.1 |
| HNBS-90M | 39.9 | 36.9 | 32.9 | 28.3 | 22.7 | 19.7 | 14.6 | 12.8 | 9.5 | 8.3 | 6.2 |
| HNBS-110M | 46.7 | 43.2 | 38.6 | 33.1 | 26.6 | 23.1 | 17.1 | 15.0 | 11.1 | 9.8 | 7.2 |
| HNBS-125M | 54.9 | 50.8 | 45.4 | 39.0 | 31.3 | 27.2 | 20.1 | 17.7 | 13.1 | 11.5 | 8.5 |
| HNBS-145M | 61.0 | 56.4 | 50.4 | 43.3 | 34.8 | 30.2 | 22.3 | 19.6 | 14.5 | 12.8 | 9.5 |
| HNBS-165M | 71.8 | 66.3 | 59.3 | 50.9 | 40.9 | 35.5 | 26.3 | 23.1 | 17.1 | 15.0 | 11.1 |
| HNBS-195M | 83.8 | 77.5 | 69.3 | 59.5 | 47.8 | 41.5 | 30.7 | 27.0 | 20.0 | 17.6 | 13.0 |
| HNBS-220M | 95.1 | 87.9 | 78.6 | 67.4 | 54.2 | 47.0 | 34.8 | 30.6 | 22.7 | 19.9 | 14.7 |
| Air Factor | 1.924 | 2.002 | 2.103 | 2.245 | 2.485 | 2.722 | 3.266 | 3.568 | 4.340 | 4.665 | 5.401 |

Performance and air factor listed is for ambient temperature 95° F and inlet pressure 110 psig.

Please consult Holtec for performance at other conditions. Air factor listed may vary by ±5%.


Physical Characteristics

Notes:

N₂ pressure will typically be 20 psi lower than compressor outlet pressure (with reasonable pressure drop for filters included). In some cases, lower pressure drop may be possible. Please consult factory for details where relevant.

| Model Number | Max Inlet Pressure (psig) | Inlet (in.) | Outlet (in.) | Length (in.) | Width (in.) | Height (in.) | Weight (lb.) |
|--------------|---------------------------|-------------|--------------|--------------|-------------|--------------|--------------|
| HNBS-30M | 150 | 3/4" | 1/2" | 35 | 26 | 80 | 702 |
| HNBS-40M | 150 | 3/4" | 1/2" | 35 | 26 | 100 | 738 |
| HNBS-50M | 150 | 3/4" | 3/4" | 35 | 26 | 80 | 870 |
| HNBS-60M | 150 | 3/4" | 3/4" | 35 | 26 | 96 | 1000 |
| HNBS-75M | 150 | 1" | 3/4" | 35 | 30 | 80 | 1060 |
| HNBS-90M | 150 | 1" | 3/4" | 35 | 30 | 100 | 1194 |
| HNBS-110M | 150 | 1.5" | 1" | 35 | 30 | 80 | 1292 |
| HNBS-125M | 150 | 1.5" | 1" | 35 | 30 | 91 | 1443 |
| HNBS-145M | 150 | 1.5" | 1" | 35 | 37 | 85 | 1500 |
| HNBS-165M | 150 | 1.5" | 1" | 35 | 37 | 96 | 1630 |
| HNBS-195M | 150 | 1.5" | 1" | 35 | 39 | 90 | 1850 |
| HNBS-220M | 150 | 1.5" | 1" | 35 | 39 | 99 | 2025 |

Typical Flow Diagram with Lubricated Screw Compressors

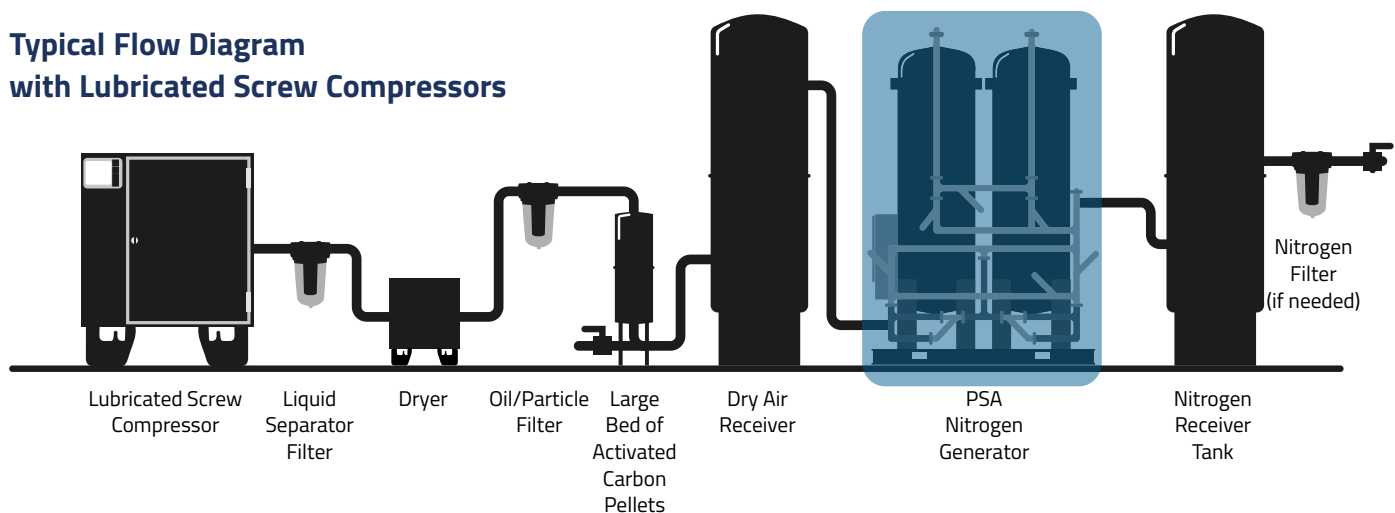



Your Nitrogen generator plays a critical role in your facility. Because quality is so essential, we now offer NitroCheck™ tests to help provide you with peace of mind that your equipment continues to operate at its best. Contact us for more information.

NitroBreeze™ Series

At Holtec, your satisfaction is our top priority.

We specialize in providing cutting-edge on-site nitrogen (N₂) generator systems catering to various industries. With our focus on innovation, efficiency, reliability, and performance, we are your ultimate provider for all nitrogen generation needs.

We are experts at designing a solution that is right for your needs rather than simply providing a standard product. We will work with you to solve your application challenges. Let Holtec be your valued partner during the N₂ generation system selection process!



Delivering the **Science** of Nitrogen Generation™

979 Portwest Drive, Suite 101, Saint Charles, MO 63303

Tel.: 1-653-757-3920

Fax: 1-636-757-3923

E-Mail: sales@holtecllc.com

holtecllc.com